














## BẢNG GIÁ VAN UL/FM

Kích thước	Hình ảnh	Đơn giá Chưa VAT	Trọng lượng	Chứng Nhận	Thông số Kỹ thuật
			KGS		
2"		2,015,017	7.90	UL/ULC	1. Valve Body: Ductile Iron 2. Disc: Ductile iron + EPDM 3. Stem Bushing: PTFE 4. Gear box: Ductile Iron 5. Epoxy Coating Color: RAL3000 6. Pressure Rating: 300PSI
2-1/2"		2,110,641	8.10	FM and UL/ULC	
3"		2,189,156	8.90		
4"		2,445,480	10.10		
5"		2,908,363	13.60		
6"		3,188,705	15.90		
8"		4,926,032	31.00		
10"		10,442,512	39.90		
12"		12,180,028	76.60		
2"		Wafer Type butterfly valve with signal gearbox (Model No. WD-371X)	2,012,726		




2-1/2"	 <p style="text-align: center;">    </p>	2,098,002	8.50	FM and UL/ULC	1. Valve Body: Ductile Iron 2. Disc: Ductile iron + EPDM 3. Stem Bushing: PTFE 4. Gear box: Ductile Iron 5. Epoxy Coating Color: RAL3000 6. Pressure Rating: 300PSI
3"		2,166,042	8.60		
4"		2,469,237	10.60		
5"		2,726,679	11.80		
6"		3,087,428	14.40		
8"		4,644,279	25.70		
10"		9,195,007	33.70		
12"		11,049,513	68.60		
2-1/2"	 <p style="text-align: center;">  </p>	2,463,489	8.20	UL/ULC	1. Valve Body: Ductile Iron 2. Disc: Ductile iron + EPDM 3. Stem Bushing: PTFE 4. Gear box: Ductile Iron 5. Epoxy Coating Color: RAL3000. 6. Pressure Rating: 300PSI/175PSI 7. Have Groove type and Groove*Flange Type.
3"		2,553,353	8.90		
4"		2,831,090	10.10		
6"		3,496,790	15.90		
8"		5,315,249	31.00		
10"		7,504,695	39.90		
2"	<b>200 PSI OSY Gate valve with Handwheel Flange (Model No. Z41)</b>	2,449,862	15.00	FM and UL/ULC	
2-1/2"		2,701,587	18.00		
3"		3,341,176	20.60		



4"	 	4,466,416	27.60	FM and UL/ULC	1.Valve Body:Ductile Iron 2.Disc: Ductile iron + EPDM 3.Stem: SS304 4.Handwheel: Steel 5. Epoxy Coating Color: RAL3000 6. Pressure Rating: 200PSI
5"		5,914,399	40.00		
6"		7,047,846	48.00		
8"		10,820,332	80.60		
10"		16,082,421	127.80		
12"		21,801,523	178.40		
14"		53,314,000	210.00		
16"		71,852,000	300.00		
2"	<b>200 PSI OSY Gate valve with Handwheel (F*G) (Model No. Z481)</b>  	2,301,499	11.60	FM and UL/ULC	1.Valve Body:Ductile Iron 2.Disc: Ductile iron + EPDM 3.Stem: SS304 4.Handwheel: Steel 5. Epoxy Coating Color: RAL3000 6. Pressure Rating: 200PSI
2-1/2"		2,537,979	15.00		
3"		3,209,321	20.60		
4"		4,205,639	27.60		
5"		5,569,188	40.00		
6"		6,636,478	48.00		
8"		10,003,515	80.60		
10"		15,612,086	127.80		
12"		21,163,931	178.40		
2"		<b>200 PSI OSY Gate valve with Handwheel (G*G) (Model No. Z81)</b>	2,075,599		
2-1/2"	2,315,176		15.00		

3"		2,803,004	20.60	FM and UL/ULC	1. Valve Body: Ductile Iron 2. Disc: Ductile iron + EPDM 3. Stem: SS304 4. Handwheel: Steel 5. Epoxy Coating Color: RAL3000 6. Pressure Rating: 200PSI
4"		3,559,580	27.60		
5"		4,927,922	40.00		
6"		5,872,318	48.00		
8"		9,052,744	80.60		
10"		14,128,255	127.80		
12"		19,152,432	178.40		





2"	<b>200 PSI NRS Gate valve with round plate (F*F) (Model No. Z45)</b> 	2,949,068	10.80	FM	1. Valve Body: Ductile Iron 2. Disc: Ductile iron + EPDM 3. Stem: SS304 4. Handwheel: Steel 5. Epoxy Coating Color: RAL3000 6. Pressure Rating: 200PSI
2-1/2"		3,188,386	13.20	FM and UL/ULC	
3"		3,690,727	16.60		
4"		4,599,704	27.40		
5"		5,805,327	36.65		
6"		6,868,824	47.25		
8"		9,923,267	76.55		
10"		14,774,972	113.10		
12"		20,048,450	179.70		
2"	<b>200 PSI NRS Gate valve with round plate (F*G) (Model No. Z485)</b> 	2,890,086	11.60	FM	1. Valve Body: Ductile Iron 2. Disc: Ductile iron + EPDM 3. Stem: SS304 4. Handwheel: Steel 5. Epoxy Coating Color: RAL3000 6. Pressure Rating: 200PSI
2-1/2"		3,124,618	15.00	FM and UL/ULC	
3"		3,616,912	20.60		
4"		4,507,710	27.60		
5"		5,689,220	40.00		
6"		6,731,447	48.00		
8"		9,724,801	80.60		
10"		13,659,880	127.80		
12"		19,647,481	178.40		
2"	<b>200 PSI NRS Gate valve with round plate (G*G) (Model No. Z85)</b>	2,689,550	11.60	FM and UL/ULC	
2-1/2"		2,907,808	15.00		
3"		3,365,943	20.60		



4"			4,194,930	27.60	FM and UL/ULC	1. Valve Body: Ductile Iron 2. Disc: Ductile iron + EPDM 3. Stem: SS304 4. Handwheel: Steel 5. Epoxy Coating Color: RAL3000 6. Pressure Rating: 200PSI
5"			5,294,458	40.00		
6"			6,264,367	48.00		
8"			9,050,019	80.60		
10"			13,474,775	127.80		
12"			18,284,187	178.40		
2-1/2"			3,486,149	23.40	FM and UL/ULC	1. Valve Body: Ductile Iron 2. Disc: Ductile iron + EPDM 3. Stem: SS304 4. Handwheel: Steel 5. Epoxy Coating Color: RAL3000 6. Pressure Rating: 200PSI
3"			3,987,495	27.60		
4"			5,021,364	39.00		
5"			7,151,623	51.60		
6"			8,124,002	68.60		
8"			12,890,392	115.00		
10"			18,512,162	147.80		
12"			25,696,520	213.00		
2-1/2"			3,571,425	20.20	FM and UL/ULC	1. Valve Body: Ductile Iron 2. Disc: Ductile iron + EPDM 3. Stem: SS304 4. Handwheel: Steel 5. Epoxy Coating Color: RAL3000 6. Pressure Rating: 300PSI
3"			4,007,057	25.00		
4"			5,018,208	34.00		
5"			6,706,057	56.40		

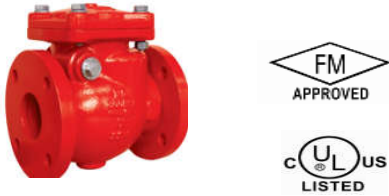

6"		 	7,597,500	71.20	<b>FM and UL/ULC</b>	1. Valve Body: Ductile Iron 2. Disc: Ductile iron + EPDM 3. Stem: SS304 4. Handwheel: Steel 5. Epoxy Coating Color: RAL3000 6. Pressure Rating: 300PSI
8"			11,921,703	112.00		
10"			16,726,102	140.80		
12"			22,653,330	201.60		




2-1/2"	<p><b>300 PSI OSY Gate valve with Handwheel (G*G)(Model No. Z81-300)</b></p>  <p>FM APPROVED</p> <p>cULUS LISTED</p>	3,179,368	23.40	FM and UL	<p>1.Valve Body:Ductile Iron 2.Disc: Ductile iron + EPDM 3.Stem: SS304 4.Handwheel: Steel 5. Epoxy Coating Color: RAL3000 6. Pressure Rating: 300PSI</p>
3"		3,636,596	27.60		
4"		4,579,484	39.00		
5"		6,522,280	51.60		
6"		7,409,090	68.60		
8"		11,756,038	115.00		
10"		16,883,092	147.80		
12"		23,435,226	213.00		
2-1/2"	<p><b>300 PSI NRS Gate valve with Handwheel (G*G)(Model No. Z85-300)</b></p>  <p>FM APPROVED</p> <p>cULUS LISTED</p>	3,287,184	25.00	FM and UL	<p>1.Valve Body:Ductile Iron 2.Disc: Ductile iron + EPDM 3.Stem: SS304 4.Handwheel: Steel 5. Epoxy Coating Color: RAL3000 6. Pressure Rating: 300PSI</p>
3"		3,688,144	29.00		
4"		4,357,378	41.00		
5"		5,822,960	53.00		
6"		6,597,012	74.00		
8"		10,351,777	120.00		
10"		14,523,501	151.00		
12"		17,978,134	217.00		
2-1/2"	<p><b>300 PSI OSY Gate valve with Handwheel (G*F)(Model No.Z481-300)</b></p>	3,416,426	23.40		



3"	 	3,907,746	27.60	FM and UL	1. Valve Body:Ductile Iron 2.Disc: Ductile iron + EPDM 3.Stem: SS304 4.Handwheel: Steel 5. Epoxy Coating Color: RAL3000 6. Pressure Rating: 300PSI
4"		4,920,937	39.00		
5"		7,008,590	51.60		
6"		7,961,522	68.60		
8"		12,632,584	115.00		
10"		18,141,919	147.80		
12"		25,182,590	213.00		
2-1/2"	<b>300 PSI NRS Gate valve with Handwheel (F*F)(Model No. Z485-300)</b>  	3,536,079	25.00	FM and UL	1. Valve Body:Ductile Iron 2.Disc: Ductile iron + EPDM 3.Stem: SS304 4.Handwheel: Steel 5. Epoxy Coating Color: RAL3000 6. Pressure Rating: 300PSI
3"		3,845,948	29.00		
4"		4,816,445	41.00		
5"		6,436,432	53.00		
6"		7,292,033	74.00		
8"		11,081,039	120.00		
10"		15,546,653	151.00		
12"	21,055,920	217.00			

4"-12"	<b>INDICATOR POST (Model No. ZSQ)</b> 	9,752,000	85.00	FM and UL/ULC	1.Handwheel: DI 2.Dring Rod: SS304 3.Indicator Cover: CI 4.Flange: CI 5. Epoxy Coating Color: RAL3000 6.Bolt: 1035.
4"-12"	<b>WALL POST (Model No. QSCZG)</b> 	7,590,000	40.00	FM and UL/ULC	1.Keyhole Plate Gasket: EPDM 2.Handwheel: CI 3.Retainer Ring For Stem:1566 4.Main Body: CI 5.Driver:SS304 6. Epoxy Coating Color: RAL3000
2"	<b>300PSI SWING CHECK VALVE Flanged (Model No. MH-XQH-300)</b>	3,059,142	14.50	FM and UL	1.Valve Body: Ductile Iron ASTM A536 65-45-12 2.Disc: Ductile iron ASTM A536 65-45-12 3.Stem: SS304 4.O-Ring : EPDM 5. Epoxy Coating Color: RAL3000 6. Pressure Rating: 300PSI
2-1/2"		3,766,655	20.00		
3"		4,563,463	25.00		
4"		5,667,703	34.00		
5"		8,315,705	55.00		

6"		9,620,556	65.00	FM and UL	1. Valve Body: Ductile Iron ASTM A536 65-45-12 2. Disc: Ductile iron ASTM A536 65-45-12 3. Stem: SS304 4. O-Ring : EPDM 5. Epoxy Coating Color: RAL3000 6. Pressure Rating: 300PSI
8"		15,966,371	114.00		
10"		23,164,415	185.00		
12"		34,881,411	280.00		
6" BURY LENGTH(1063M M)	HYDRANT (Model No. MH-1510FA/MH- 1510A) 	33,580,000	197.00	FM and UL	1. Main Body: Ductile Iron 2. Cover Gasket: EPDM 3. Flange connector: Ductile Iron 4. Epoxy Coating Color: RAL3000 5. Pressure Rating: 250PSI
2	350PSI SWING CHECK VALVE GROOVE (Model No. MH-XQH-381G)	922,487	2.80	FM and UL	1. Valve Body: Ductile Iron. 2. Disc: SS304 3. Disc Sealing Ring: EPDM 4. Spring: SS304 5. O-Ring: EPDM 6. Seat : 95400 7. Epoxy Coating Color: RAL3000 8. Pressure Rating: 350PSI.
2-1/2"		1,375,363	4.60		
3"		1,716,353	6.20		
4"		2,222,958	8.90		
5"		3,008,376	14.30		

6"	  	3,922,578	20.30	<b>FM and UL</b>	1. Valve Body: Ductile Iron. 2. Disc: SS304 3. Disc Sealing Ring: EPDM 4. Spring: SS304 5. O-Ring: EPDM 6. Seat : 95400 7. Epoxy Coating Color: RAL3000 8. Pressure Rating: 350PSI.
8"		5,541,445	35.70		
10"		8,602,000	56.00		
12"		12,328,000	79.60		